





USER MANUAL

IMPACT WRENCH & DRIVER

MODELS : FW-66S-1,FW-66SD-1,-10

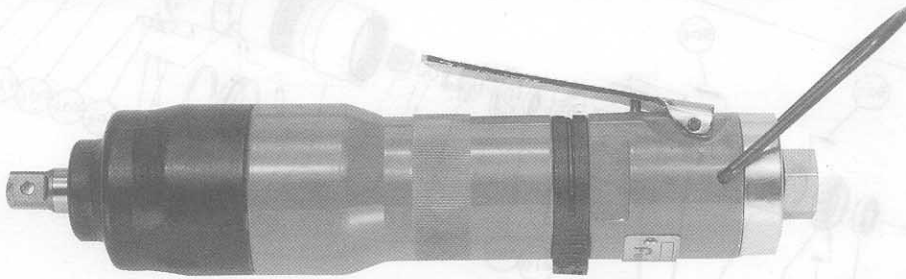

FW-66S-1

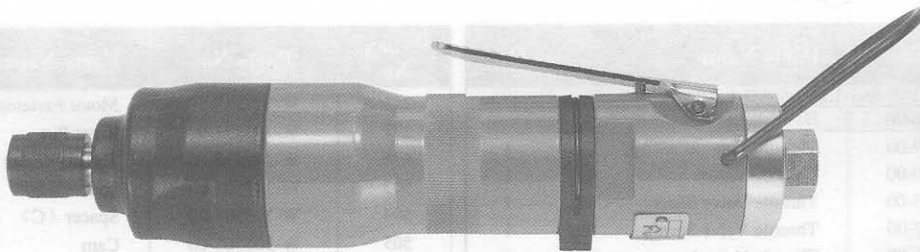

FW-66SD-1,-10

SPECIFICATIONS

Model	Capacity (Guidance)		Free Speed	Side to Center		Square Drive Size		Bit Shank Size		Overall Length		Mass (without socket)		Air Consumption (Under Load)		Air Inlet Thread Size	Air Hose Size	
	mm	in		mm	in	mm	in	mm	in	mm	in	kg	lb	Nm ³ /min	Nft ³ /min		in	mm
FW-66S-1	5	1/4	5400	22.5	5/8	9.5	3/8	-	-	210	8 17/64	0.78	1.7	0.40	14.1	PT or NPT 1/4	6.3	1/4
FW-66SD-1	5	1/4	5400	22.5	5/8	-	-	6.35	1/4	216	8 1/2	0.78	1.7	0.40	14.1	PT or NPT 1/4	6.3	1/4
FW-66SD-10	5	1/4	5400	22.5	5/8	-	-	6.35	1/4	216	8 1/2	0.78	1.7	0.40	14.1	PT or NPT 1/4	6.3	1/4

*The performance figures are at 0.63MPa (6.3bar)



Refer to instructions and warning for safety use enclosed in each tool box.

FUJI AIR TOOLS CO., LTD.

1-14, Kamiji 2-chome, Higashinari-ku, Osaka 537-0003, Japan
 Tel : (06) 6972-2335
 Fax : (06) 6972-2250

BOLT & NUT SETTERS
SCREW DRIVERS

ABRASIVE TOOLS

DRILLS · TAPPERS

PERCUSSION TOOLS

AIR MOTORS & OTHERS

OTHER PRODUCTS

Specifications are subjects to change without notice.



This manual is made by using recycled paper approved with ECO Mark (authorized by Japan Environmental Association).

