




# USER MANUAL

## DIE GRINDERS

( REAR EXHAUST TYPE )

MODELS : FG-12UX-1, -1F, -2

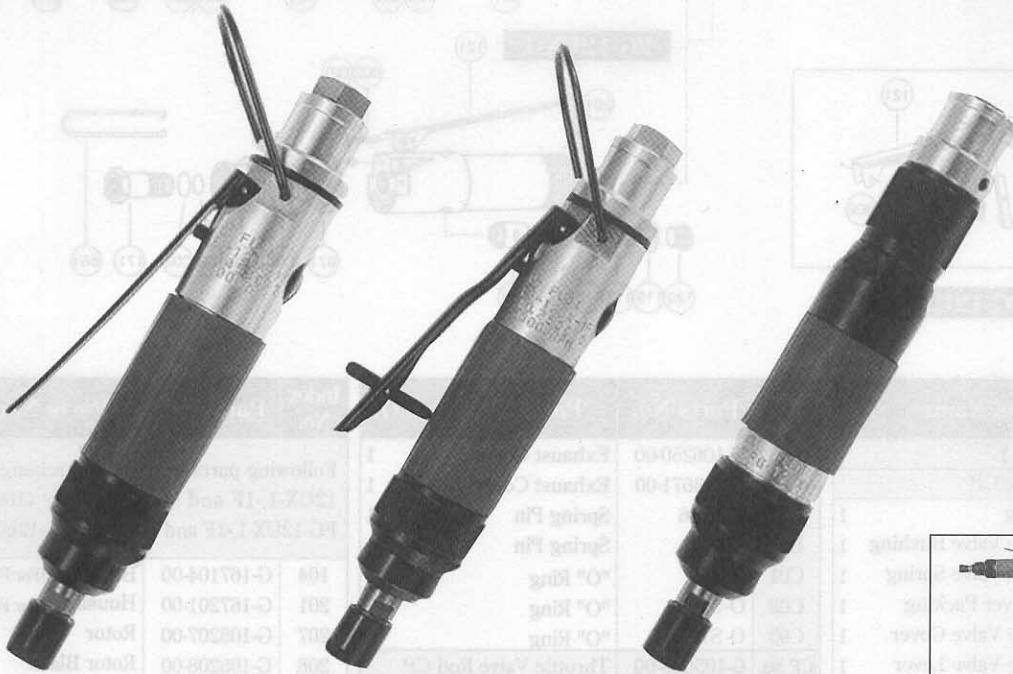

FG-12UX-1

FG-12UX-1F

FG-12UX-2



REAR EXHAUST TYPE

### SPECIFICATIONS

Model	Collet Capacity		Capacity				Max. Free Speed min <sup>-1</sup>	Overall Length (about)		Mass (about)		Air Consumption Under Load (about)		Air Inlet Thread Size PT or NPT	Air Hose Size	
	mm	in	Grinding Wheel		Burr Head			mm	in	kg	lb	Nm <sup>3</sup> /min	Nft <sup>3</sup> /min		mm	in
			mm	in	mm	in										
FG-12UX-1	3, 6	1/8 or 1/4	13	1/2	8	5/16	43,000	213	8 <sup>25</sup> /64	0.65	1.3	0.3	10.6	1/4"	6.3	1/4
FG-12UX-1F	3, 6	1/8 or 1/4	13	1/2	8	5/16	43,000	213	8 <sup>25</sup> /64	0.65	1.3	0.3	10.6	1/4"	6.3	1/4
FG-12UX-2	3, 6	1/8 or 1/4	13	1/2	8	5/16	43,000	211	8 <sup>5</sup> /16	0.70	1.5	0.3	10.6	1/4"	6.3	1/4

The performance figures are at 0.63 MPa (6.3 bar).



Refer to "The Instructions and Warning for Safety Use" enclosed in each tool box.

FUJI AIR TOOLS CO., LTD.

2-1-14 Kamiji, Higashinari-ku, Osaka, 537-0003 Japan

Tel : (06)6972-2335

Fax : (06)6972-2250

BOLT & NUT SETTERS  
SCREW DRIVERS

ABRASIVE TOOLS

DRILLS · TAPPERS

PERCUSSION TOOLS

AIR MOTORS & OTHERS

OTHER PRODUCTS



